




EXSYS[®] **EPPINGER**


Tooling Catalog

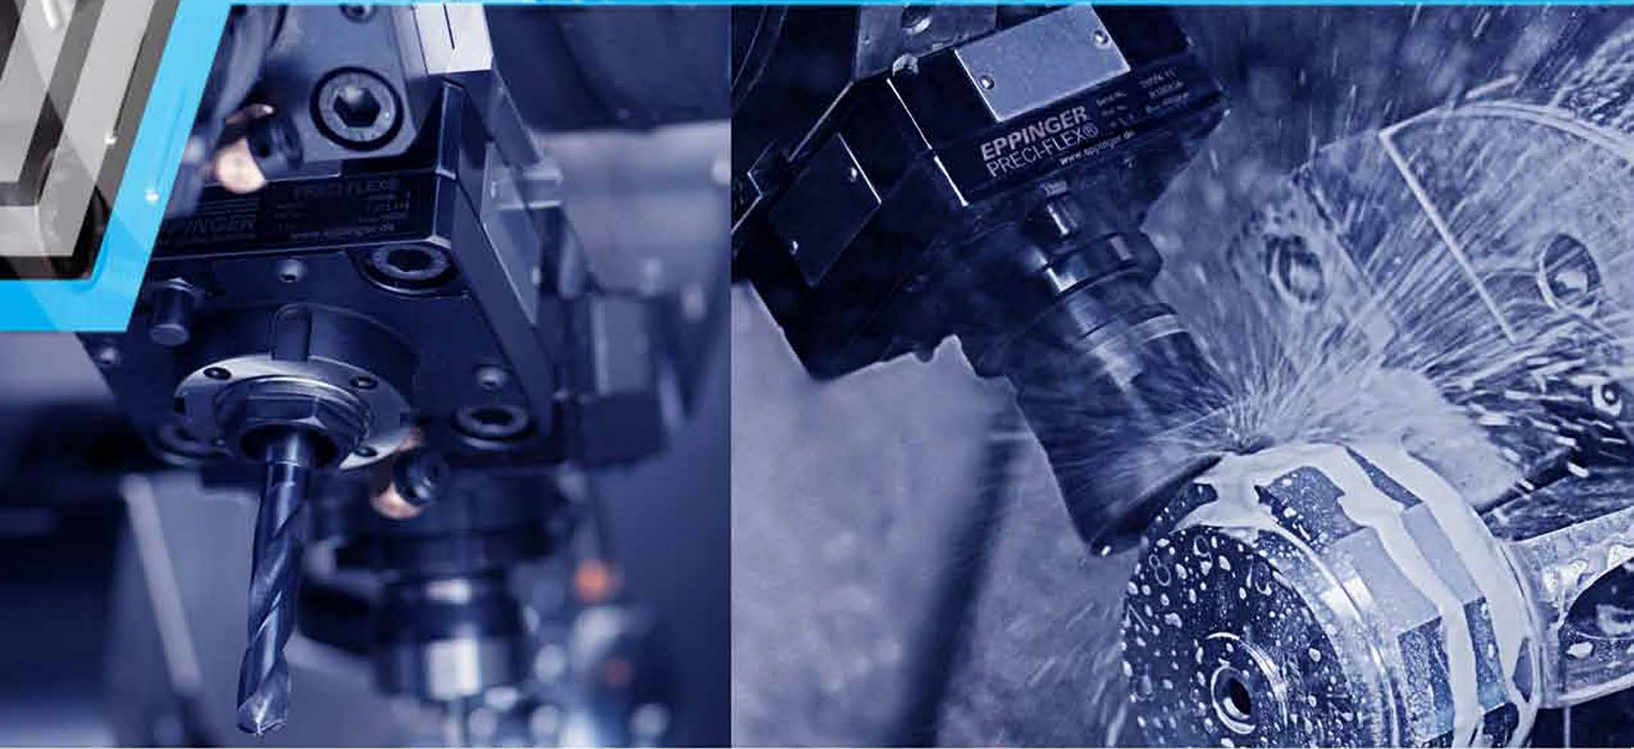


Mazak

EXSYS Automation, Inc.
15200 Citrus Country Drive
Dade City, Florida 33523
P : 352.588.4345 F : 352.588.4821
www.exsysautomation.com


Nexus QTN 200 / 250 (M,MS,MSY) SQT 15 / 18 (M,MS)




- 7.074.726 External Coolant**
7.075.255 Internal Coolant
 • Drilling and Milling Head
 • Axial, Right Hand Offset
 • Adjustable Alignment Pin
 • Collet Chuck, ER32
 • PRECI-FLEX®




- 7.074.725 External Coolant**
7.075.256 Internal Coolant
 • Drilling and Milling Head
 • Radial, Right Hand
 • Adjustable Alignment Pin
 • Collet Chuck, ER32
 • PRECI-FLEX®




- 7.074.805 External Coolant**
 • Drilling and Milling Head
 • Axial, Angular Adjustable
 • Adjustable Alignment Pin
 • Collet Chuck, ER20
 • PRECI-FLEX®




- 7.074.365**
 • Device for Gear Milling
 • Chuck for Cutter Arbor (3/4")
 • Angle Adjustable ±20°

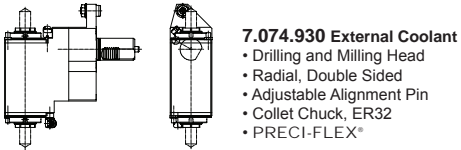


- 7.074.930 External Coolant**
 • Drilling and Milling Head
 • Radial, Double Sided
 • Adjustable Alignment Pin
 • Collet Chuck, ER32
 • PRECI-FLEX®

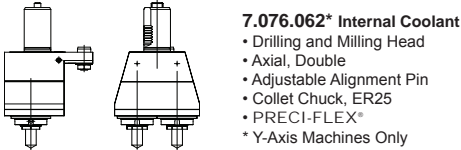


- 7.076.062* Internal Coolant**
 • Drilling and Milling Head
 • Axial, Double
 • Adjustable Alignment Pin
 • Collet Chuck, ER25
 • PRECI-FLEX®
 * Y-Axis Machines Only




- 7.078.824 External Coolant**
 • Boring Bar Holder
 • Radial, Left Hand - Right Hand
 • Cylindrical Chuck
 • 1 1/2" (38.1mm)



- 7.076.061 External & Internal Coolant**
 • Boring Bar Holder
 • Radial, Left Hand - Right Hand
 • Multiple Cylindrical Chuck
 • 1 1/2" (38.1mm)




- 7.076.059* External Coolant**
 • Tool Holder
 • Axial
 • Multi, Rectangular Transverse
 • 1" (25.4mm)
 * Y-Axis Machines Only




- 7.076.060* External Coolant**
 • Tool Holder
 • Axial
 • Multi, Rectangular transverse
 • 1" (25.4mm)
 * Y-Axis Machines Only


QTN 300 / 350 / 400 / 450 (M,MS,MY,MSY) SQT 28 / 30 / 300 (M,MS)




- 7.075.257 External Coolant**
7.075.258 Internal Coolant
 • Drilling and Milling Head
 • Axial, Right Hand Offset
 • Adjustable Alignment Pin
 • Collet Chuck, ER40
 • PRECI-FLEX®




- 7.075.259 External Coolant**
7.075.260 Internal Coolant
 Drilling and Milling Head
 • Radial, Right Hand
 • Adjustable Alignment Pin
 • Collet Chuck, ER40
 • PRECI-FLEX®




- 7.075.261 External Coolant**
7.075.262 Internal Coolant
 • Drilling and Milling Head
 • Axial, Right Hand Offset
 • Adjustable Alignment Pin
 • Quick Change, CAT40




- 7.075.263 External Coolant**
7.075.264 Internal Coolant
 • Drilling and Milling Head
 • Radial, Right Hand
 • Adjustable Alignment Pin
 • Quick Change, CAT40

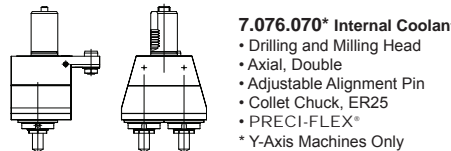


- 7.076.070* Internal Coolant**
 • Drilling and Milling Head
 • Axial, Double
 • Adjustable Alignment Pin
 • Collet Chuck, ER25
 • PRECI-FLEX®
 * Y-Axis Machines Only




- 7.078.445**
 • Device for Gear Milling
 • Chuck for Cutter Arbor (22mm)
 • Angle Adjustable ±30.5°



- 7.076.063* External Coolant**
 • Tool Holder, Axial
 • Multiple Rectangular Transverse
 • 1 1/4" (31.75mm)
 * Y-Axis Machines Only



- 7.076.064* External Coolant**
 • Boring Bar Holder, Radial
 • Left Hand - Right Hand
 • Multiple Cylindrical Chuck
 • 1 1/2" (38.1mm)
 * Y-Axis Machines Only




- 7.076.114* External Coolant**
 • Tool Holder
 • Axial, Multiple Square Shanks
 • 1" (25.4mm)
 * Y-Axis Machines Only

Hyper Quadrex 200 (MSY) MP 420/620/625/6200/6250 - 12-Station



- 7.074.620 External Coolant**
7.074.685 Internal Coolant
 • Drilling and Milling Head
 • Axial, Right Hand
 • Offset Collet Chuck, ER32
 • PRECI-FLEX®




- 7.074.682 External Coolant**
7.074.684 Internal Coolant
 • Drilling and Milling Head
 • Radial, Right Hand
 • Adjustable Alignment Pin
 • Collet Chuck, ER32
 • PRECI-FLEX®

QTU 250 (M-UY) / QTS 100 / 200 / 250 (M)




- 7.075.430 External Coolant - 6000RPM**
7.075.460 Internal Coolant - 6000RPM
7.075.065 External Coolant - 12000RPM
7.079.070 Internal Coolant - 12000RPM
 • Drilling and Milling Head
 • Axial Collet Chuck, ER32
 • PRECI-FLEX®




- 7.075.465 External Coolant - 6000RPM**
7.075.470 Internal Coolant - 6000RPM
7.079.090 External Coolant - 12000RPM
7.079.095 Internal Coolant - 12000RPM
 • Drilling and Milling Head
 • Radial, Right Hand
 • Adjustable Alignment Pin
 • Collet Chuck, ER32
 • PRECI-FLEX®




- 7.075.785 External Coolant**
 • Drilling and Milling Head
 • Axial, Angular Adjustable
 • Adjustable Alignment Pin
 • Collet Chuck, ER20
 • PRECI-FLEX®



- 7.078.954 External & Internal Coolant**
 • Boring Bar Holder, Radial
 • Left Hand - Right Hand
 • 1 1/2" (38.1mm)




- 7.078.950 External Coolant**
 • Tool Holder
 • Face Holder
 • 1" (25.4mm)



- 7.078.946 External Coolant**
 • Tool Holder
 • OD Holder
 • 1" (25.4mm)

QTS 300 (M)



- 7.075.634 External Coolant**
7.075.635 Internal Coolant
 • Drilling and Milling Head
 • Axial Collet Chuck, ER40
 • PRECI-FLEX®



- 7.075.640 External Coolant**
7.075.642 Internal Coolant
 • Drilling and Milling Head
 • Radial, Right Hand
 • Adjustable Alignment Pin
 • Collet Chuck, ER40
 • PRECI-FLEX®



- 7.075.790 External Coolant**
 • Drilling and Milling Head
 • Axial, Angular Adjustable
 • Adjustable Alignment Pin
 • Collet Chuck, ER20
 • PRECI-FLEX®

Hyper Quadrex 100 / 150 (MSY) / MP6100




- 7.075.235 External Coolant**
7.075.240 Internal Coolant
 • Drilling and Milling Head
 • Axial, Right Hand
 • Offset Collet Chuck, ER32
 • PRECI-FLEX®



- 7.075.230 External Coolant**
7.075.232 Internal Coolant
 • Drilling and Milling Head
 • Radial, Right Hand
 • Adjustable Alignment Pin
 • Collet Chuck, ER32
 • PRECI-FLEX®



- 7.075.175 External Coolant**
 • Drilling and Milling Head
 • Axial, Angular Adjustable
 • Adjustable Alignment Pin
 • Collet Chuck, ER20
 • PRECI-FLEX®



- 7.076.088* External Coolant**
 • Spindle Unit for Side Milling cutters
 • Radial, Right Hand
 • Adjustable Alignment Pin
 • Chuck for Cutter Arbor 16mm
 * Hyper Quadrex 100/150 (MSY) Only

* All Internal Coolant Holders are 1000PSI Compatible.

Don't see what you need? More tooling available on our website